

## PERMANENT MOUNT MODELS

### Wireless Hand-Held Remote

- 30001 (white)
- 30061 (chrome)
- 30511 (black)

### Hard Wired Dash Remote

- 30201 (white)
- 30261 (chrome)
- 30211 (black)

## PORTABLE MODELS


### Magnetic Base

#### Wireless Hand-Held Remote

- 30003 (white)
- 30063 (chrome)
- 30513 (black)



### Stryker HID Light Beam Dimensions

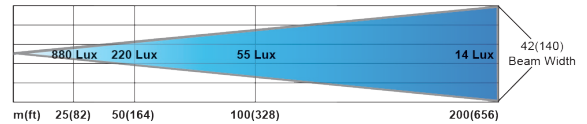

**Illuminance (Lux)** 880 220 55 14

**Peak Beam Intensity:** 550,000 Candela

**Maximum Beam Distance:** 1,483 m / 4,865 ft

**Beam Angle:** 12°



<b>Housing:</b>	ASA Luran heat resistant High impact, UV resistant material
<b>Gears &amp; Transmission Parts:</b>	Delrin and stainless steel
<b>Fasteners:</b>	Stainless Steel
<b>Motors:</b>	Automotive grade 12V D.C. High Torque, R.P.M. 6087 Constant Torque 17.133 mN.m/amp, Stall:12.31 mN.m Draw point 4 amps Output: 1.96 watts w/built in stall protection circuitry Built in stall protection circuitry
<b>Light Specifications:</b>	Phillips D1S 85v 35w XenStart Gen3 Bulb Phillips rated bulb life: 3,000 hr. XV4D 12v soft start ballast
<b>Raw luminous flux:</b>	3000lm
<b>Color Temperature:</b>	4100k
<b>Peak Beam Intensity</b>	550,000 Candela
<b>Max Beam Distance:</b>	4,865 ft.
<b>Operating Temperature:</b>	-40c to 95c
<b>Reflector:</b>	Computer generated parabolic reflector
<b>Power Consumption:</b>	35W
<b>Max Cold Start:</b>	8 amp at 12v nominal
<b>Max Current Draw:</b>	3.5 amps
<b>Wireless Remote Controls:</b>	Radio Frequency: 433 MHz 2187 programmable channels Transmitter power: 2 Duracell MN21 12v batteries
<b>Warranty:</b>	5 Year Limited Warranty
<b>Mounting Options:</b>	Permanent Mount or Portable Magnetic Base
<b>Rockguard:</b>	Not available for HID Styker Models